


WC-UY910



A Brand of



Heavy Equipment

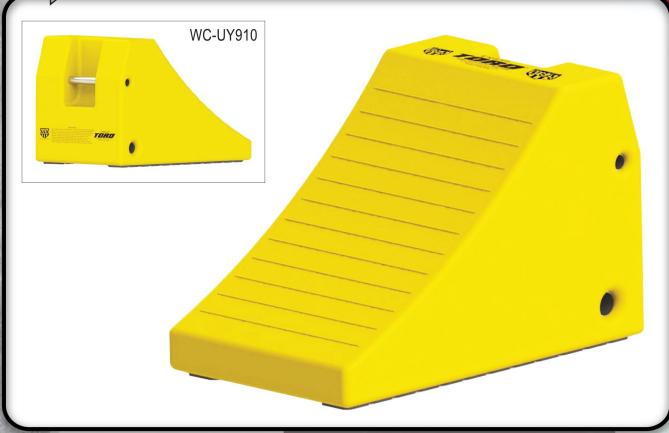

Testing & qualification is required for individual vehicle for correct product selection to meet site requirements.

Advised GVW is a guide only. This will vary due to environmental factors. Please complete at adequate risk assessment before using chocks. Do not use chocks if chocks are damaged.

Part #: WC-UY910	
Tire Size	165" (419.10cm)
Height	16" (40.70cm)
Width	14.5" (36.90cm)
Length	24.6" (62.50cm)
Weight	32 lbs (14.52kg)
GVW (Gross Vehicle Operating Weight)	400 Ton* (1,600,000lbs)

*Minimum of 4

HIGHLIGHTS:

- Tough urethane construction
- Rated for vehicles with gross vehicle operating weight up to 1,600,000 lbs & tire sizes up to 165 in. Use a minimum of (4) UY910 chocks.
- 3rd party tested for compliance
- ANSI compliant color written guidelines on proper chocking procedures
- Gross Vehicle Operating Weight (GVW) of 400 ton
- Complies with NFPA 1901 and NFPA 1906 Standards
- Meets MSHA specifications
- Resistant to oils, fuels and solvents
- Strong carrying handle on the backside of the chock
- High visibility color used for safety
- Holes for mounting brackets

For More Information Call or Visit Us Online Today!

DS-TORO-WC-UY910-Re Release Date: 11/15/20

ADDRESS:

2115 W. Mountain View Rd. Phoenix, AZ 85021 USA

2677 192nd St. #107 Surrey, BC V3Z 3X1 CANADA USA

T: 602.424.2500

F: 602.424.9777

E: Sales@DriverIndustrial.com

CAN T: 604.560.5080

F: 604.560.5090

E: SalesCanada@SafetyWhips.com